

# PowerSelect Universal (120Vac-277Vac) 100W Electronic Metal Halide Ballast Specifications

PS13U10L



INPUT SPECIFICATIONS

● Vac +/-10%	120Vac	277Vac
● Amps @ 100W	0.94A	0.40A
● Power @ 100W	113W	112W
● Frequency	50/60Hz	
● THD	<7%	
● Power Factor	>98%	






Pictured with hanger extended

OUTPUT SPECIFICATIONS

● Output Power (Selectable)	100W +/- 2%
● Lamp Drive Frequency	150Hz +/-10%
● Lamp Current Crest Factor	<1.2
● Open Circuit Voltage	>300V Square Wave
● Ignitor Voltage @ Ballast Leads	>3.8KV
● Ignition Failure Timeout	30 Min. Shutdown
● Maximum distance from Ballast	2.5M or 10 Feet Max.
● Compatible 100W ANSI Lamp Types	M90, M140

## MECHANICAL / ENVIRONMENTAL

● Enclosure Dimensions	6.80" L x 2.29" W x 1.93" H
● Unit Weight	44oz.
● Enclosure & Finish	Clear Anodized Extruded Aluminum
● Operating Temperature	-30° to 90°C
● EMI / RFI Compliance	FCC Part 18
● Sound Rating	Rated 'A'
● UL / CUL Listed	File #E173598
● Input Wire	UL 1015 18 ga. 105c, Length 8"
● Output Wire	UL SF 18 ga. 200c, Length 8"
● Warranty	Up to 5 years when operated below 75C.

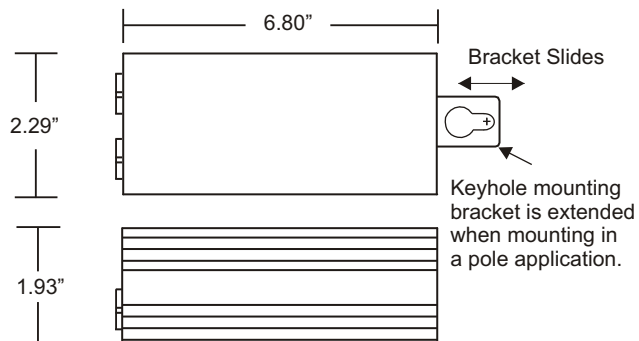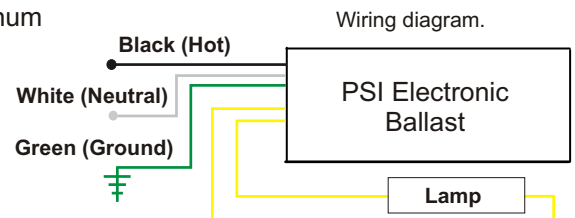

**PowerSelect Inc.**

Tel: (714) 901-3900 Fax: (714) 901-0026  
E-mail - sales@powerselectinc.com

PSI reserves the right to modify any specifications without notice..

Revised 09-26-08