


# PowerSelect Universal (120Vac-277Vac) 70W Electronic Metal Halide Ballast Specifications

## PS13U70L

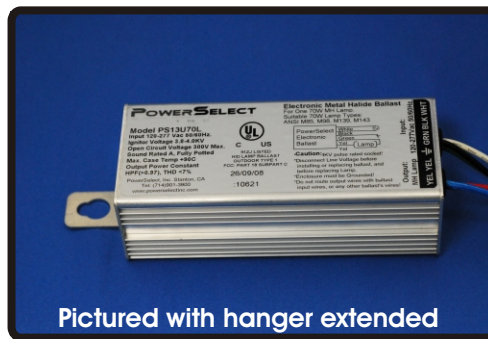

### INPUT SPECIFICATIONS





● Vac +/-10%	120Vac	277Vac
● Amps @ 70W	0.64A	0.27A
● Power @ 70W	77W	76W
● Frequency	50/60Hz	
● THD	<7%	
● Power Factor	>98%	

### OUTPUT SPECIFICATIONS

● Output Power (Selectable)	70W +/- 2%
● Lamp Drive Frequency	150Hz +/-10%
● Lamp Current Crest Factor	<1.2
● Open Circuit Voltage	>300V Square Wave
● Ignitor Voltage @ Ballast Leads	>3.8KV
● Ignition Failure Timeout	30 Min. Shutdown
● Maximum distance from Ballast	2.5M or 10 Feet Max.
● Compatible 70W ANSI Lamp Types	M98,M143,M139,M85

### MECHANICAL / ENVIRONMENTAL

● Enclosure Dimensions	5.43" L x 2.31" W x 1.73" H
● Unit Weight	35oz.
● Enclosure & Finish	Clear Anodized Extruded Aluminum
● Operating Temperature	-30° to 90°C
● EMI / RFI Compliance	FCC Part 18
● Sound Rating	Rated 'A'
● UL / CUL Listed	File #E173598
● Input Wire	UL 1015 18 ga. 105c, Length 8"
● Output Wire	UL SF 18 ga. 200c, Length 8"
● Warranty	Up to 5 years when operated below 75C.

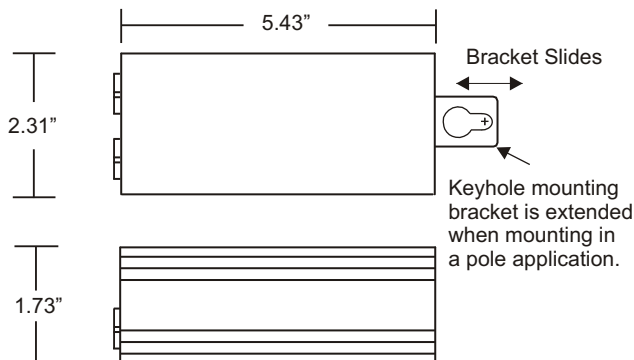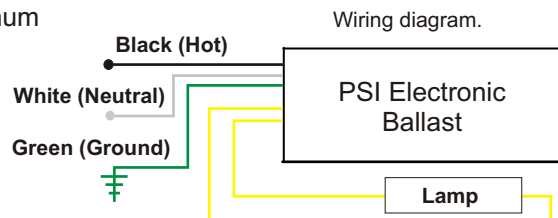

***PowerSelect Inc.***

Tel: (714) 901-3900 Fax: (714) 901-0026

PSI reserves the right to modify any specifications without notice..

Revised 09-26-08

E-mail - sales@powerselectinc.com